

Change Mode **168**- 868–878–578–6X2

Doing this Mod Can/Will void your warranty.

Download this “[AT Options version 9](#)” software and
un-Zip with ([7-Zip](#) – [Video 1](#) – [Video 2](#))

Software requires Windows 7 or higher

Anytone Options

☒ Band Select
☒ Full Test Mode
☒ Chinese

Area Code

Manufacture Code

Com Port

Read

Radio Type

Band Setting Password

Frequency

Program Password

Serial Number

Production Date

Maintenance Date

Maintenance Description

Exit

Dealer Information

Dealer Code

Stock Date

Sell Date

Seller

Open the software by double clicking on the - AT_Options.exe -

Plug radio into Computer.
Set Com Port.

Then Click – **Read**.

The radio will send info and reboot.


The info for that radio is now in the software.

Go to Frequency and you will see what your radio default is.

UK we want to change to Band 0

Use the pull down to select the band you want.

Now **Write** back to radio.

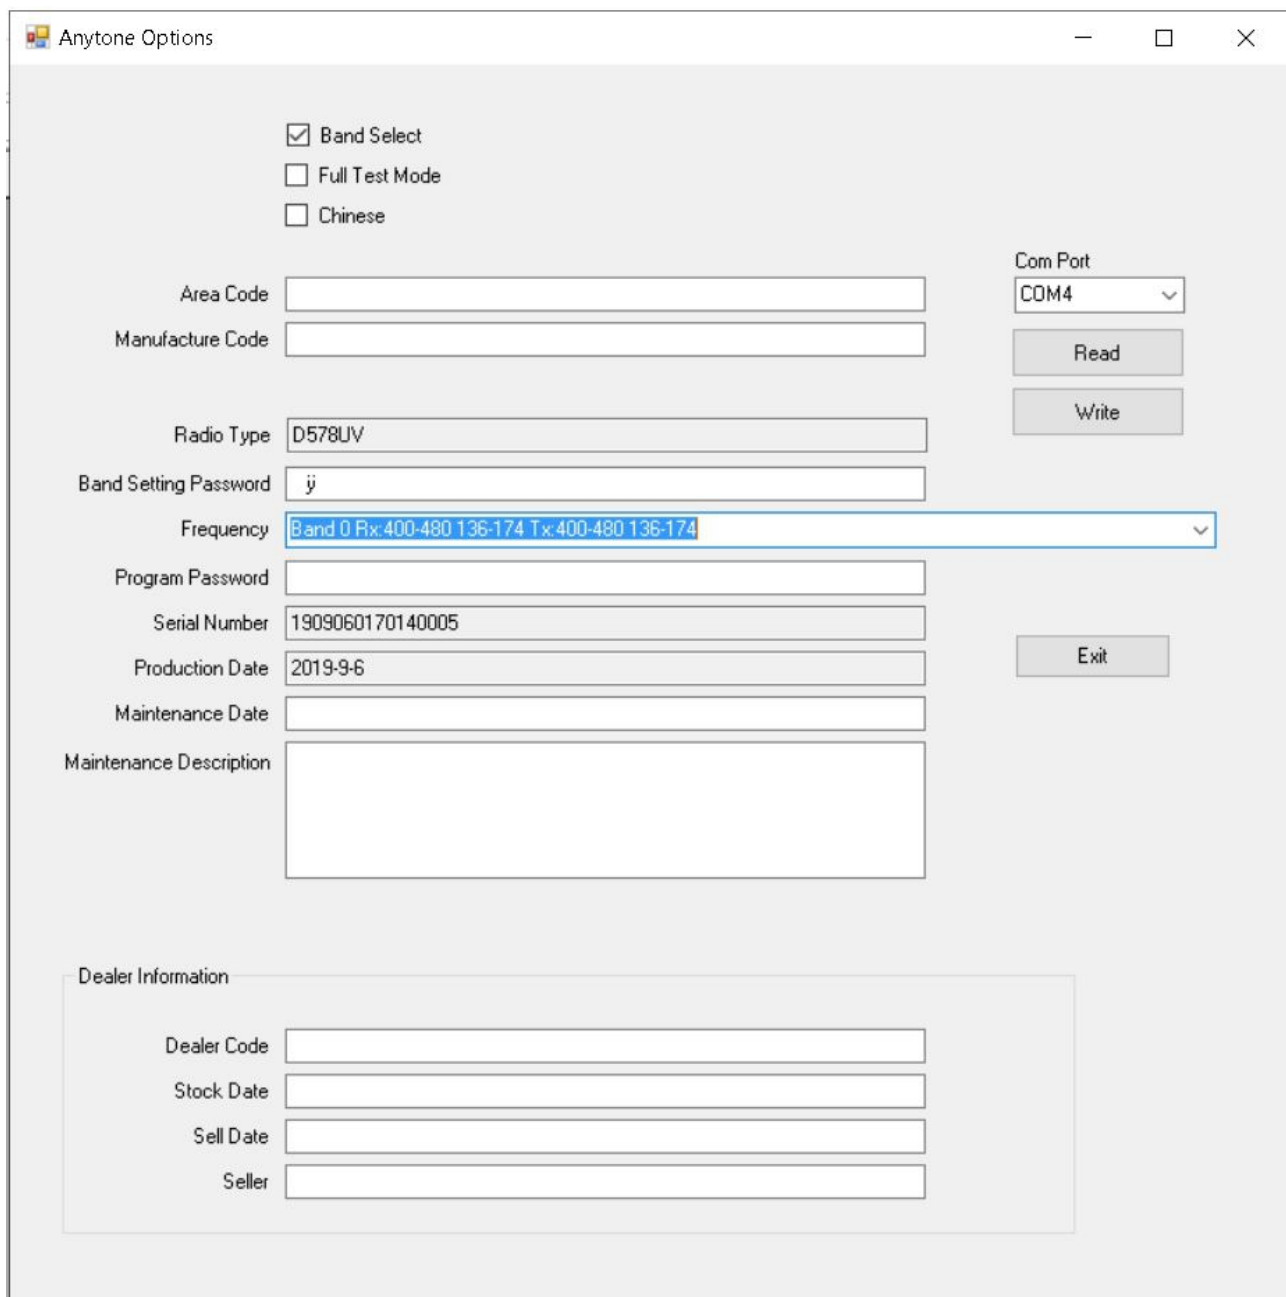

The screenshot shows the 'Anytone Options' window with the following fields and controls:

- ☒ Band Select
- ☐ Full Test Mode
- ☐ Chinese
- Area Code:
- Manufacture Code:
- Radio Type:
- Band Setting Password:
- Frequency:
- Program Password:
- Serial Number:
- Production Date:
- Maintenance Date:
- Maintenance Description:
- Com Port:
- Read:
- Write:
- Exit:


Dealer Information:

- Dealer Code:
- Stock Date:
- Sell Date:
- Seller:

Next

In the CPS – Model – Model Information

Make sure the Band displayed matches the same as you have now set the Radio to.

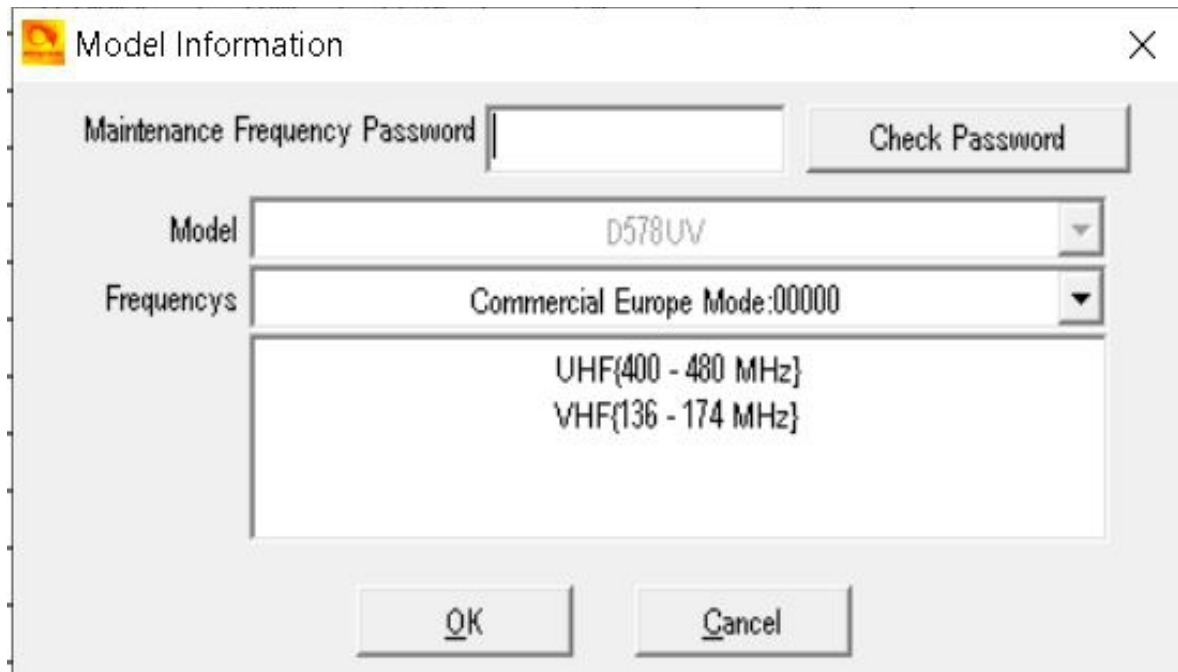

The screenshot shows a 'Model Information' dialog box with a close button (X) in the top right corner. It contains the following fields and controls:

- Maintenance Frequency Password:** A text input field followed by a 'Check Password' button.
- Model:** A dropdown menu currently displaying 'D578UV'.
- Frequencies:** A dropdown menu currently displaying 'Commercial Europe Mode:00000'.
- Band:** A text area displaying 'UHF{400 - 480 MHz}' and 'VHF{136 - 174 MHz}'.
- Buttons:** 'OK' and 'Cancel' buttons at the bottom.

Options

1. Read the radio to the CPS and build your codeplug.
2. Via [Import CSV](#) rebuild your codeplug.

Remember to save this as your working Codeplug.

That is it.

<http://tiny.cc/AnytoneDMR>